

BUCKINGHAM MFG.

PN 6308 OX Block – WebGrab Combo Gauge Inspection Instructions

Warning: Do not use this product if you cannot understand and follow the instructions and warnings that come with it and complete all necessary functions.

Please consult with your physician prior to using this product. Do not use this product under the influence of drugs or alcohol.

Notes: Colors / Hardware may vary from those shown below.

Fig. 1


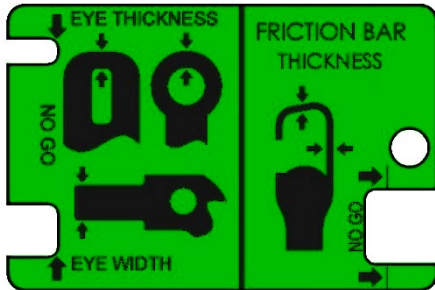


Fig. 2

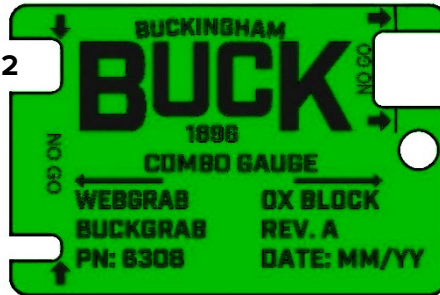

Attachment hole used to hang gauge or attach to key ring (key ring not included)

Date shown (MM/YY) is the Date of Manufacture and will vary.

The Buckingham Mfg. PN 6308 Ox Block – WebGrab Combo Inspection Gauge (Fig. 1 & 2) is designed to check the friction bar thickness on all Ox Blocks (Fig. 3) and the eye thickness and width of the WebGrab and BuckGrab supplied on our SuperSqueeze, EZSqueeze, BuckAdjuster, LeverJuster and SuperStrap series products. (Fig. 4 -7).

Fig. 3
PN 50062
Friction Bar



Fig. 4
PN 488W2



Fig. 5
PN 488R
WebGrab for Outer Strap



Fig. 6
PN 9-8
BuckGrab



Fig. 7
PN 92-M8
LeverGrab



Eye Thickness Inspection:

1. Place the eye thickness window (Fig. 8) onto the worn area of the cam eye (Fig. 9 & 10). If any portion of the cam eye fits to the bottom of the slot the cam is excessively worn, and the product needs to be removed from service.

Fig. 8



Fig. 9


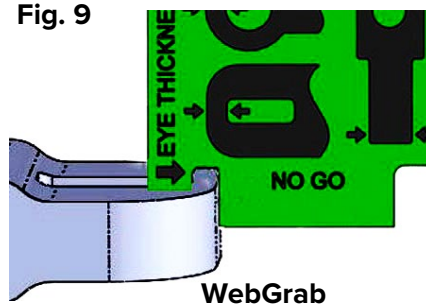


Fig. 10

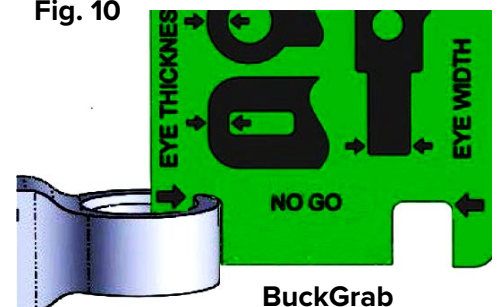

Eye Width Inspection:

1. Place the eye width window (Fig. 11) onto the worn area of the cam eye (Fig. 12 & 13). If any portion of the cam eye fits to the bottom of the slot the cam is excessively worn, and the product needs to be removed from service.

Fig. 11

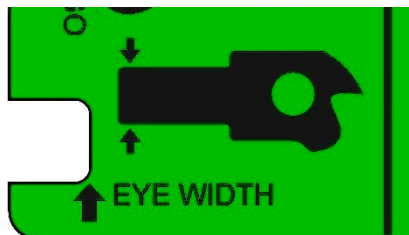


Fig. 12


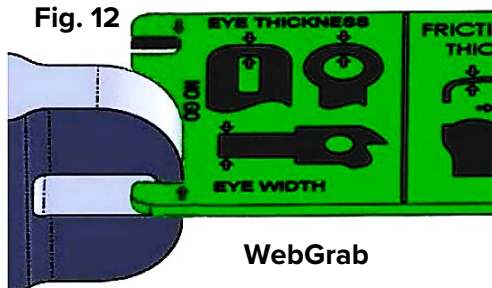


Fig. 13

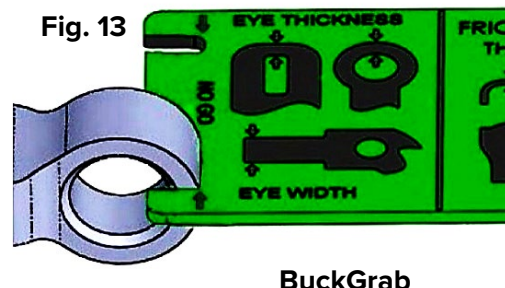

Ox Block Friction Bar Inspection:

1. Place the friction bar thickness window (Fig. 14) onto the worn area of the Ox Block friction bar (Fig. 15 & 16). If any portion of the friction bar fits into the friction bar thickness window past the NO GO line (Fig. 15 & 16), the bar is excessively worn, and the Ox Block needs to be removed from service.

Fig. 14



Fig. 15



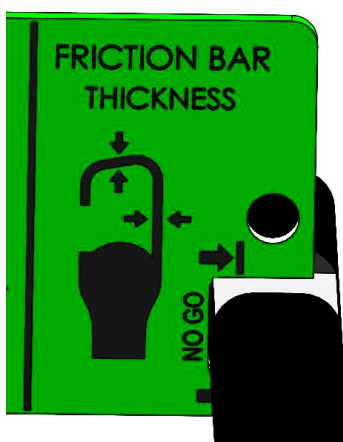


Fig. 16

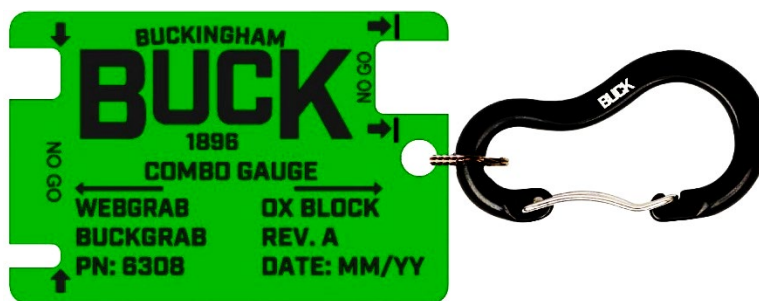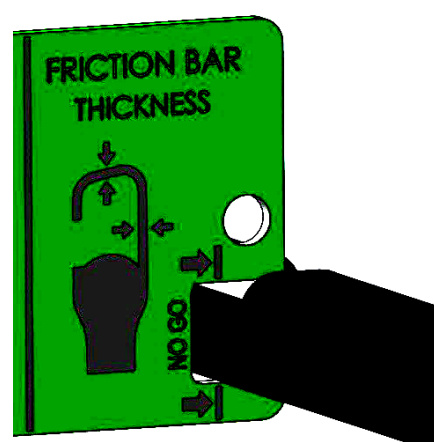

6308 Gauge shown attached to a Key Chain Carabiner (Key Chain Carabiner Not included).

NOTE: This product cannot be returned unless it is in new / unused condition.

STATEMENT of OBSOLESCENCE:

Precise “useful life expectancy” or “shelf life” for this product is not specified, as the degree of use, conditions of use, and the degree of care and storage determines useful life. All users maintain responsibility to select proper equipment for the job, be properly trained in its use, and ensure all personnel support equipment passes inspection before each use. Upon evidence of defects, damage or deterioration, all equipment shall be removed from service immediately and tagged or marked as unusable or destroyed. Additionally, all equipment shall be inspected on a regular basis not to exceed one year by a Competent Person, as defined by OSHA/ANSI, to verify that the equipment is safe for use. In the event of any question or concern regarding the condition of such equipment, users shall remove the equipment from service for further inspection. All users must comply with OSHA/ANSI/ASTM standards prior to and in using such equipment. For more information regarding safe and appropriate use of equipment, please contact Buckingham Manufacturing at 1-800-937-2825.

INTERNATIONAL USERS:

Notwithstanding the above, please know that certain international jurisdictions require manufacturers of equipment to provide customers with a maximum useful lifespan (sometimes referred to as a “Statement of Obsolescence”). To the extent required, Buckingham personal protective equipment manufactured from synthetic fiber materials including but not limited to items such as webbing and/or rope are subject to a maximum useful lifespan of ten (10) years from the date of manufacture. As stated above proper usage, storage, maintenance, and care impacts the useful lifespan of equipment. Extreme circumstances may require that product must be retired after only one use. This statement is made in conformance and compliance with BS EN 365:2004. International users must ensure that product inspections are completed by Competent Persons as defined by international standards including but not limited to British Standard (“BS”). If equipment fails any inspections, it must be immediately withdrawn from service and destroyed. For more information regarding safe and appropriate use of equipment, please contact Buckingham Manufacturing at 1-800-937-2825.

OUR GUARANTEE:

We guarantee the equipment we manufacture to be free from defects in material and workmanship. We will repair any equipment deemed to be defective which is returned to us by the original purchaser. However, this guarantee is void if any product is changed or altered in any way, or if the product is used in a manner other than for which it is intended. This express guarantee supersedes all other expressed or implied guarantees, obligations or liabilities. There are no implied warranties of merchantability or fitness for a particular purpose and as such, all implied warranties are specifically disclaimed.

LIMITATION ON LIABILITY:

In no event will Buckingham or buyer be liable to the other for lost revenues, lost profits or any other indirect, consequential, special or punitive losses or damages, however caused, whether in action for breach of contract, strict liability, tort, or otherwise, even if advised of the possibility of such losses or damages. In no event will Buckingham’s liability exceed the total amount paid by the buyer to Buckingham for the product or equipment giving rise to such claim(s).

Please see other terms and conditions relating to this product at <https://buckinghammfg.com/terms-conditions/>

REGISTRATION:

Before use of the product, ensure to register and confirm the product at www.buckinghammfg.com/register.

BUCKINGHAM MFG.

P.O. Box 1690,

Binghamton, NY 13904

www.buckinghammfg.com

1-800-937-2825