

# BUCKINGHAM MFG.


## Instructions / Warnings

### PN 2410 and PN 2410G

### Bucket Hook with Tether Connection Eye

Warning: Do not use this product if you cannot understand and follow the instructions and warnings that come with it and complete all necessary functions.

The Buckingham Bucket Hook with Tether Connection Eye was designed to fit a bucket with up to a 2 ½" lip. (2 ½" lip measurement includes bucket and liner)

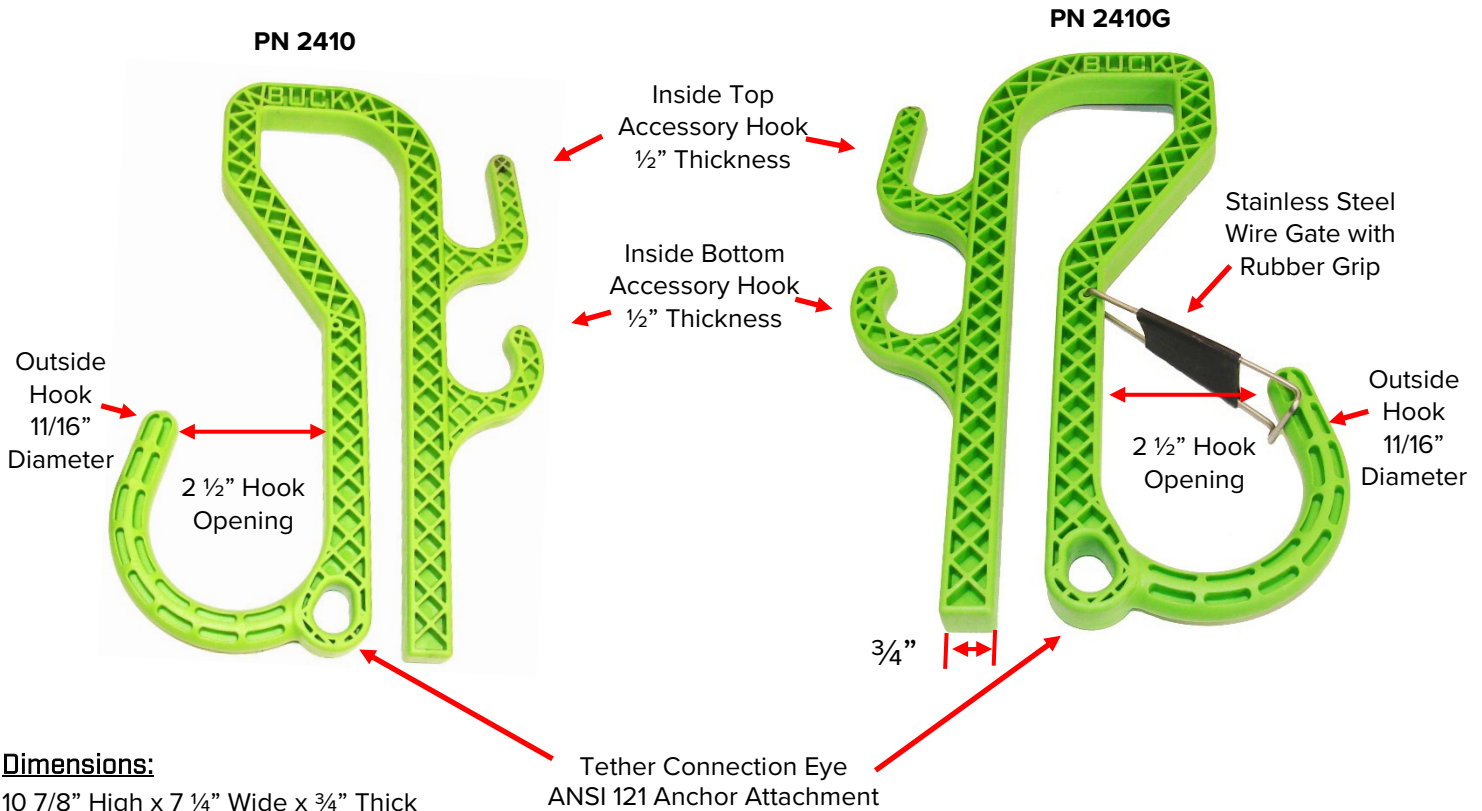

#### Dimensions:

10 7/8" High x 7 ¼" Wide x ¾" Thick

#### Rating:

**Outside Hook:** 40 lbs. WLL (3:1 safety factor)

**Inside Accessory Hooks:** 30 lbs. WLL (3:1 safety factor)

**Tether Connection Eye:** 8 lbs. Tool with a Maximum Tether Length of 51" (to allow the tool to have a maximum of 102" Free Fall).

Tether Connection Eye is rated as an ANSI 121 Anchor Attachment (when properly attached to the bucket)

#### Inspection:

##### **Hook:**

- Inspect to ensure component is free of cracks, cuts, distortion or nicks.
- Ensure hook portions are not bent or distorted.
- Ensure tether connection eye is intact.

##### **Gate (PN 2410G only):**

- Inspect to ensure gate is free of cracks, distortion or nicks.
- Ensure gate closes and properly aligns with the outside hook portion.
- Ensure gate remains securely attached to the hook, with tabs fully inserted in body of hook.

## Warnings:

- Know the job and the regulations governing performance requirements and select the proper equipment.
- Read carefully, understand, and heed these and all other included instructions, warnings, and cautions before using this equipment. Failure to do so could result in your serious injury or death. Should questions arise concerning the proper use or condition of your equipment, contact Buckingham Manufacturing Co. at 1-800-937-2825.
- This equipment is intended for use by properly trained professionals only.
- Do not use for human support.
- This large outside hook portion is designed with a maximum working load of 40 lbf.
- Ensure carabiner is positioned so that its gate is never load bearing.
- Only the tether connection eye is designed to be impact loaded and has a WLL of 8lbs. with a maximum of a 51" tool tether.
- Never use this hook for a fall arrest, fall restraint or work positioning attachment.
- Never transport equipment suspended from the bucket hook, equipment should be removed from bucket hook and properly stored prior to moving Bucket Truck.
- When ascending and descending in the Bucket use caution the outside hook does not snag or become entangled in any object. Doing so can result in damage to bucket hook and any equipment attached to it.
- Be certain this equipment is suitable for the intended use and work environment. If suitability for intended use is in doubt, consult a safety engineer or contact Buckingham Mfg. before using.
- Only Buckingham Mfg. Co., or those authorized in writing by Buckingham Mfg. Co., may make repairs to this equipment.
- Product covered under these instructions / warnings should not be resold / redistributed or re-used after use by original user.

If any evidence of wear or deterioration as outlined above is observed, immediately cease use, destroy the product, and replace it with new equipment. Should any unusual conditions not outlined above be observed, or you have reasonable doubt about a particular condition, remove the equipment from service and notify your Supervisor, Safety Director, or contact Buckingham Mfg. Co. for clarification. Failure to carefully and completely inspect your equipment could result in serious injury or death.

**Patented. For more information, visit [BuckinghamMFG.com/Patents](http://BuckinghamMFG.com/Patents).**

## **STATEMENT of OBSOLESCENCE:**

Precise "useful life expectancy" or "shelf life" for this product is not specified, as the degree of use, conditions of use, and the degree of care and storage determines useful life. All users maintain responsibility to select proper equipment for the job, be properly trained in its use, and ensure all personnel support equipment passes inspection before each use. Upon evidence of defects, damage or deterioration, all equipment shall be removed from service immediately and tagged or marked as unusable or destroyed. Additionally, all equipment shall be inspected on a regular basis not to exceed one year by a Competent Person, as defined by OSHA/ANSI, to verify that the equipment is safe for use. In the event of any question or concern regarding the condition of such equipment, users shall remove the equipment from service for further inspection. All users must comply with OSHA/ANSI/ASTM standards prior to and in using such equipment. For more information regarding safe and appropriate use of equipment, please contact Buckingham Manufacturing at 1-800-937-2825.

## **INTERNATIONAL USERS:**

Notwithstanding the above, please know that certain international jurisdictions require manufacturers of equipment to provide customers with a maximum useful lifespan (sometimes referred to as a "Statement of Obsolescence"). To the extent required, Buckingham personal protective equipment manufactured from synthetic fiber materials including but not limited to items such as webbing and/or rope are subject to a maximum useful lifespan of ten (10) years from the date of manufacture. As stated above proper usage, storage, maintenance, and care impacts the useful lifespan of equipment. Extreme circumstances may require that product must be retired after only one use. This statement is made in conformance and compliance with BS EN 365:2004. International users must ensure that product inspections are completed by Competent Persons as defined by international standards including but not limited to British Standard ("BS"). If equipment fails any inspections, it must be immediately withdrawn from service and destroyed. For more information regarding safe and appropriate use of equipment, please contact Buckingham Manufacturing at 1-800-937-2825.

## **OUR GUARANTEE:**

We guarantee the equipment we manufacture to be free from defects in material and workmanship. We will repair any equipment deemed to be defective which is returned to us by the original purchaser. However, this guarantee is void if any product is changed or altered in any way, or if the product is used in a manner other than for which it is intended. This express guarantee supersedes all other expressed or implied guarantees, obligations or liabilities. There are no implied warranties of merchantability or fitness for a particular purpose and as such, all implied warranties are specifically disclaimed.

## **LIMITATION ON LIABILITY:**

In no event will Buckingham or buyer be liable to the other for lost revenues, lost profits or any other indirect, consequential, special or punitive losses or damages, however caused, whether in action for breach of contract, strict liability, tort, or otherwise, even if advised of the possibility of such losses or damages. In no event will Buckingham's liability exceed the total amount paid by the buyer to Buckingham for the product or equipment giving rise to such claim(s).

Please see other terms and conditions relating to this product at <https://buckinghammfg.com/terms-conditions/>

## **REGISTRATION:**

Before use of the product, ensure to register and confirm the product at [www.buckinghammfg.com/register](http://www.buckinghammfg.com/register).

### **BUCKINGHAM MFG.**

Binghamton, NY

[www.buckinghammfg.com](http://www.buckinghammfg.com)

1-800-937-2825

Information contained in these written instructions supersedes all other information (written, audio, video etc.) produced by Buckingham Mfg. prior to the revision date of this document.