


# BUCKINGHAM MFG.

## Adjustable Body Belt Adjustment Instructions

Warning: Do not use this product if you cannot understand and follow the instructions and warnings that come with it and complete all necessary functions.





The Buckingham adjustable body belt (Patent Pending / Stacked Four D-ring Body Belts are Patented) has been designed with an adjustable man rated upper belt strap and an adjustable lower work positioning Dee piece that allows the user to customize the size of their body belt.

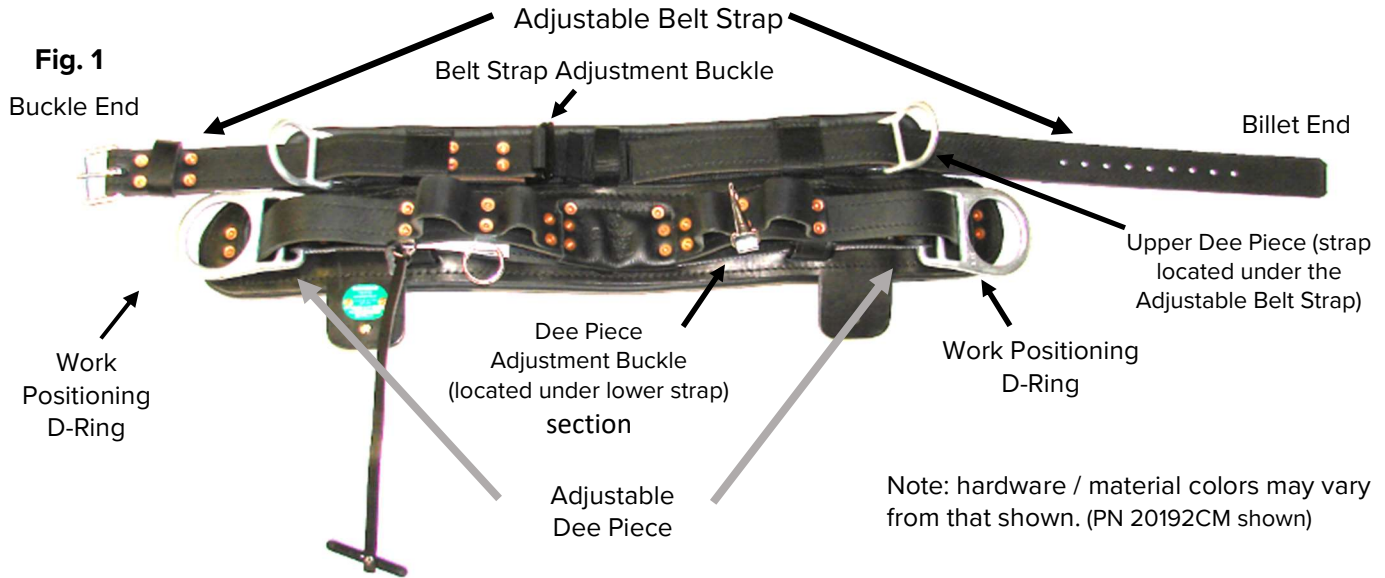

### Adjustable Belt Strap Adjustment Instructions:



#### To Lengthen the Adjustable Belt Strap:

1. Lay the belt on a flat surface with the belt strap facing up (Fig. 1)
2. Rotate the adjustment buckle 90° so it is perpendicular to the strap (Fig.2)
3. Feed extra webbing from top of strap through the adjustment buckle forming a slack loop (Fig. 3)
4. Pull webbing slack loop from the bottom, away from the buckle, lengthening the strap to the desired length.
5. Once adjusted, lay the buckle flat against the strap and pull excess strap towards the billet end of the belt, flattening the strap (Fig. 4)

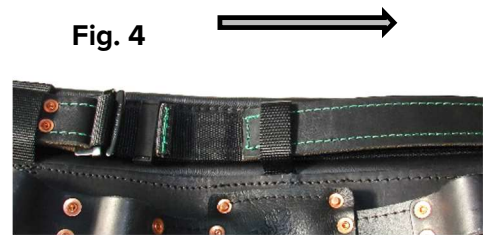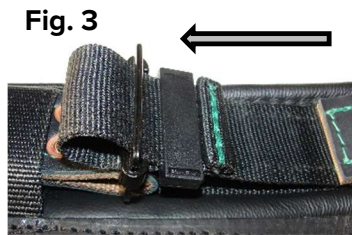

#### To Shorten the Adjustable Belt Strap:


1. Lay the belt on a flat surface with the belt strap facing up (Fig. 1)
2. Rotate the adjustment buckle 90° so it is perpendicular to the strap (Fig. 5)
3. Create slack in the belt strap by pulling the billet side of the strap towards the adjustment buckle (Fig. 6)
4. Feed extra webbing from bottom of strap through the adjustment buckle forming a slack loop (Fig. 7)
5. Pull webbing slack loop from the top, away from the buckle, shortening the strap to the desired length.
6. Once adjusted, lay the buckle flat against the strap and pull excess strap towards the billet end of the belt, flattening the strap (Fig. 8)

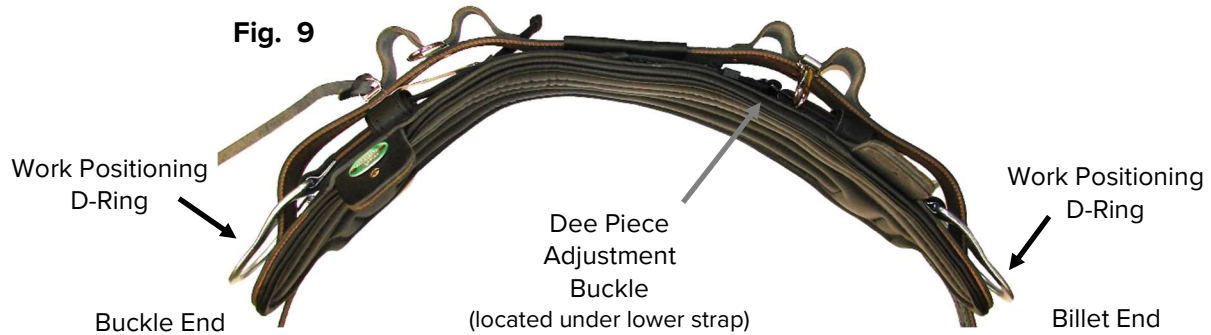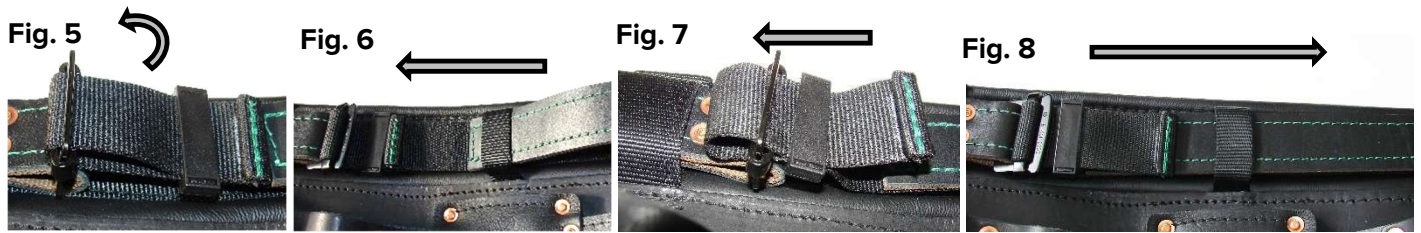

**Adjustable Lower Dee Piece Adjustment Instructions:**


**To Lengthen the Adjustable Dee Piece:**

1. Lay the belt on its edge with the lower Dee piece facing up and away (Fig. 9)
2. Rotate the adjustment buckle 90° so it is perpendicular to the dee piece strap (Fig. 10)
3. Feed extra webbing from top of strap through the adjustment buckle forming a slack loop (Fig. 11)
4. Pull webbing slack loop from the bottom, away from the buckle, lengthening the Dee piece to the desired length.
5. Once adjusted, lay the buckle flat against the strap and pull the two work positioning D-rings away from each other, tightening and flattening the Dee piece (Fig. 12)

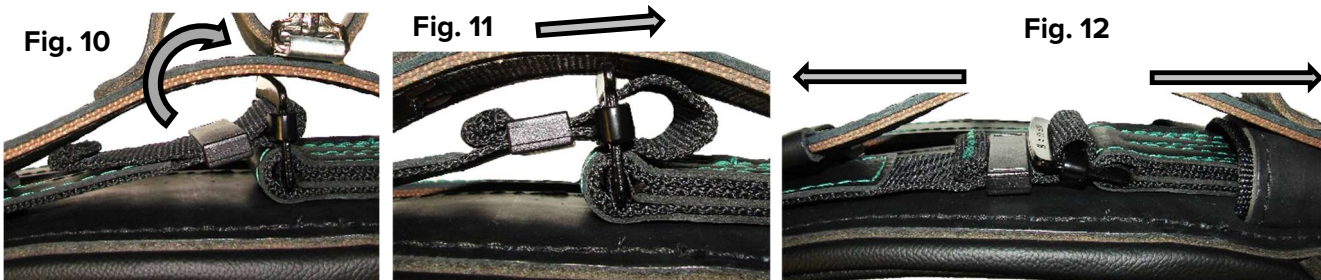

**To Shorten the Adjustable Dee Piece:**

1. Lay the belt on its edge with the lower Dee piece facing up and away (Fig. 9)
2. Rotate the adjustment buckle 90° so it is perpendicular to the dee piece strap (Fig. 13)
3. Create slack in the Dee piece by pushing the two work positioning D-ring towards each other (Fig. 14)
4. Feed extra webbing from bottom of strap through the adjustment buckle forming a slack loop (Fig. 15)
5. Pull webbing slack loop from the top, away from the buckle, shortening the strap to the desired length.
6. Once adjusted, lay the buckle flat against the strap and pull the two work positioning D-rings away from each other, tightening and flattening the Dee piece (Fig. 16)
- 7.

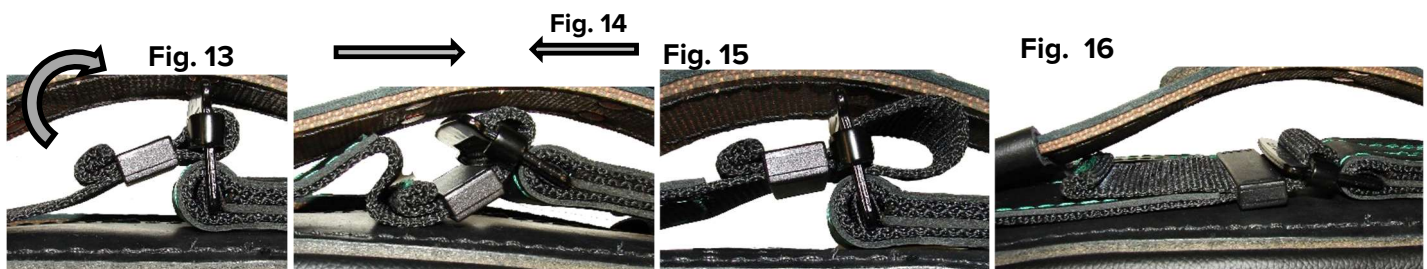

## Adjustable Upper Dee Piece Adjustment Instructions:

Adjustable upper dee pieces are available and adjust with the same procedure as the lower dee pieces on the Adjustable Stacked Four D-Ring belts. The adjustment buckle is located under the adjustable belt strap as shown below in Fig. 17. Not all Adjustable Body Belts are manufactured with an Adjustable upper Dee Piece. See the above instructions for the Adjustable Lower Dee Piece for detailed instructions.



Fig. 17

Reference Buckingham's Body Belt Instructions / Warnings (BBPSWARN.Doc) packed with the product for further information regarding the warnings for the Adjustable Body Belt.

### **Patent Pending**

**Stacked Four D-ring Body Belts are Patented. For more information, visit [BuckinghamMFG.com/Patents](http://BuckinghamMFG.com/Patents).**

### **STATEMENT of OBSOLESCENCE:**

Precise "useful life expectancy" or "shelf life" for this product is not specified, as the degree of use, conditions of use, and the degree of care and storage determines useful life. All users maintain responsibility to select proper equipment for the job, be properly trained in its use, and ensure all personnel support equipment passes inspection before each use. Upon evidence of defects, damage or deterioration, all equipment shall be removed from service immediately and tagged or marked as unusable or destroyed. Additionally, all equipment shall be inspected on a regular basis not to exceed one year by a Competent Person, as defined by OSHA/ANSI, to verify that the equipment is safe for use. In the event of any question or concern regarding the condition of such equipment, users shall remove the equipment from service for further inspection. All users must comply with OSHA/ANSI/ASTM standards prior to and in using such equipment. For more information regarding safe and appropriate use of equipment, please contact Buckingham Manufacturing at 1-800-937-2825.

### **INTERNATIONAL USERS:**

Notwithstanding the above, please know that certain international jurisdictions require manufacturers of equipment to provide customers with a maximum useful lifespan (sometimes referred to as a "Statement of Obsolescence"). To the extent required, Buckingham personal protective equipment manufactured from synthetic fiber materials including but not limited to items such as webbing and/or rope are subject to a maximum useful lifespan of ten (10) years from the date of manufacture. As stated above proper usage, storage, maintenance, and care impacts the useful lifespan of equipment. Extreme circumstances may require that product must be retired after only one use. This statement is made in conformance and compliance with BS EN 365:2004. International users must ensure that product inspections are completed by Competent Persons as defined by international standards including but not limited to British Standard ("BS"). If equipment fails any inspections, it must be immediately withdrawn from service and destroyed. For more information regarding safe and appropriate use of equipment, please contact Buckingham Manufacturing at 1-800-937-2825.

### **OUR GUARANTEE:**

We guarantee the equipment we manufacture to be free from defects in material and workmanship. We will repair any equipment deemed to be defective which is returned to us by the original purchaser. However, this guarantee is void if any product is changed or altered in any way, or if the product is used in a manner other than for which it is intended. This express guarantee supersedes all other expressed or implied guarantees, obligations or liabilities. **THERE ARE NO IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE AND AS SUCH, ALL IMPLIED WARRANTIES ARE SPECIFICALLY DISCLAIMED.**

## LIMITATION ON LIABILITY:

IN NO EVENT WILL BUCKINGHAM OR BUYER BE LIABLE TO THE OTHER FOR LOST REVENUES, LOST PROFITS OR ANY OTHER INDIRECT, CONSEQUENTIAL, SPECIAL OR PUNITIVE LOSSES OR DAMAGES, HOWEVER CAUSED, WHETHER IN ACTION FOR BREACH OF CONTRACT, STRICT LIABILITY, TORT, OR OTHERWISE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH LOSSES OR DAMAGES. IN NO EVENT WILL BUCKINGHAM'S LIABILITY EXCEED THE TOTAL AMOUNT PAID BY BUYER TO BUCKINGHAM FOR THE PRODUCT OR EQUIPMENT GIVING RISE TO SUCH CLAIM(S).

PLEASE SEE OTHER TERMS AND CONDITIONS RELATING TO THIS PRODUCT AT <https://buckinghammfg.com/terms-conditions/>

## REGISTRATION:

Before use of the product, ensure to register and confirm the product at [www.buckinghammfg.com/register](http://www.buckinghammfg.com/register).

**BUCKINGHAM MFG.**  
Binghamton, NY  
[www.buckinghammfg.com](http://www.buckinghammfg.com)  
1-800-937-2825

Information contained in these written instructions supersedes all other information (written, audio, video etc.) produced by Buckingham Mfg. prior to the revision date of this document.