

# BUCKINGHAM MFG.

## PN 66Q1 QUICK ATTACH POUCH KIT INSTRUCTIONS

Warning: Do not use this product if you cannot understand and follow the instructions and warnings that come with it and complete all necessary functions.


The PN 66Q1 has been designed for use during Linemens Rodeos as a means to quickly and securely attach or detach a tool pouch to or from a body belt. This time saving Kit allows the pouch to be attached or removed with a quick push of a button. This Kit can also be used as a convenience by those who frequently change, add or remove their tool pouch from their body belt.

### Tools required (Fig. 1):

- Hammer
- 9/32" Leather Punch
- Solid Punching Surface such as a Nylon or Wooden Block

### Kit includes (Fig. 2):

- 2 Hex Head Cap Screws
- 2 Hex Jam Nuts
- Push Button Slide Nut
- Product Instructions

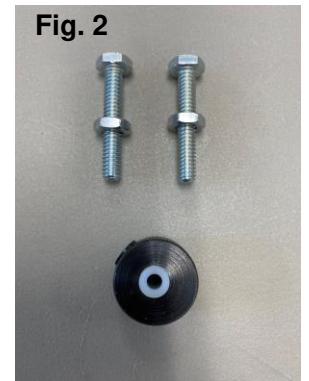

### Assembly Instructions:

1. Some Body Belt Pouch Tabs and Pouches may need to have the holes slightly enlarged for the cap screw to easily slide through.
2. Buckingham suggests using a hammer, a 9/32" leather punch and solid surface block (Fig. 1), to enlarge the holes.
3. Place the belt and / or pouch on a solid surface, align the punch over the existing hole and strike the punch sharply with the hammer (Fig. 3).
4. Insert the Hex Head Cap Screw through the holes in both layers of the body belt pouch tabs from the back side of the tabs (see Fig. 4).



Fig. 3

Fig. 4

Fig. 5

5. Thread the Hex Jam Nut onto the cap screw and securely tighten. Hand tightening may be sufficient for a single use application. Tighten using wrenches or pliers for extended or permanent attachment. (see Fig. 5).
6. Align the hole in the pouch tab over the cap screw and push the screw through the hole in the pouch (Fig. 6).
7. Press in on the side button of the Push Button Slide Nut and remove the nylon button retainer (Use caution as the side button and internal spring may pop out of the slide nut. Be careful not to lose the button or the spring).
8. With the button depressed, place the Push Button Slide Nut over the threads of the cap screw, push to the bottom and release the button. The Push Button Slide Nut is now connected to the cap screw threads and the pouch is attached to the body belt (see Fig. 7).
9. To remove, depress the button and pull upward the Push Button Slide Nut and remove the pouch.

10. Buckingham suggests storing the Push Button Slide Nut on your pouch when not in use. A second cap screw and hex nut have been supplied for this purpose. Insert the cap screw through the pouch, attach the Push Button Slide Nut and then thread the hex nut onto the cap screw for added security during storage. (see Fig 8).



**Fig. 6**



**Fig. 7**



**Fig. 8**

### **Warnings:**

- Know the job and the regulations governing performance requirements and select the proper equipment.
- It is the employer / user's responsibility to ensure that they are properly trained in the use, care and limitations of this product.
- Employer – instruct employees as to proper use, warnings, and cautions before use of this product.
- This product is intended for use by properly trained professionals only.
- Read carefully, understand, and heed these and all other included instructions, warnings, and cautions before using this equipment. Failure to do so could result in your serious injury or death. Should questions arise concerning the proper use or condition of your equipment, consult your Supervisor, Safety Director or contact Buckingham Manufacturing Co. at 1-800-937-2825.
- This device is intended to secure a tool pouch to a pouch tab of a body belt only. Never use for any other purpose.
- Never modify this device.
- The user must wear approved PPE, including but not limited to, eye protection, gloves, and hard hat when punching.
- Only Buckingham Mfg. Co. or those people authorized in writing by Buckingham Mfg. Co. may make repairs to this product.
- This product should not be resold / redistributed or re-used after use by original user.
- Always use caution when working near machinery or moving parts. Tool straps and the hanging pouch may become inadvertently entangled.
- Always use caution when working near energized power lines.
- Avoid contact of the pouch with chemicals that may damage the material. If in doubt, contact Buckingham Mfg.
- Be sure to perform a trial test while on the ground to ensure the push button slide nut is locked on and your tool pouch is secure to your body belt prior to climbing.
- Never overload your tool pouch.

## STATEMENT of OBSOLESCENCE:

Precise “useful life expectancy” or “shelf life” for this product is not specified, as the degree of use, conditions of use, and the degree of care and storage determines useful life. All users maintain responsibility to select proper equipment for the job, be properly trained in its use, and ensure all personnel support equipment passes inspection before each use. Upon evidence of defects, damage or deterioration, all equipment shall be removed from service immediately and tagged or marked as unusable or destroyed. Additionally, all equipment shall be inspected on a regular basis not to exceed one year by a Competent Person, as defined by OSHA/ANSI, to verify that the equipment is safe for use. In the event of any question or concern regarding the condition of such equipment, users shall remove the equipment from service for further inspection. All users must comply with OSHA/ANSI/ASTM standards prior to and in using such equipment. For more information regarding safe and appropriate use of equipment, please contact Buckingham Manufacturing at 1-800-937-2825.

## INTERNATIONAL USERS:

Notwithstanding the above, please know that certain international jurisdictions require manufacturers of equipment to provide customers with a maximum useful lifespan (sometimes referred to as a “Statement of Obsolescence”). To the extent required, Buckingham personal protective equipment manufactured from synthetic fiber materials including but not limited to items such as webbing and/or rope are subject to a maximum useful lifespan of ten (10) years from the date of manufacture. As stated above proper usage, storage, maintenance, and care impacts the useful lifespan of equipment. Extreme circumstances may require that product must be retired after only one use. This statement is made in conformance and compliance with BS EN 365:2004. International users must ensure that product inspections are completed by Competent Persons as defined by international standards including but not limited to British Standard (“BS”). If equipment fails any inspections, it must be immediately withdrawn from service and destroyed. For more information regarding safe and appropriate use of equipment, please contact Buckingham Manufacturing at 1-800-937-2825.

## OUR GUARANTEE:

We guarantee the equipment we manufacture to be free from defects in material and workmanship. We will repair any equipment deemed to be defective which is returned to us by the original purchaser. However, this guarantee is void if any product is changed or altered in any way, or if the product is used in a manner other than for which it is intended. This express guarantee supersedes all other expressed or implied guarantees, obligations or liabilities. THERE ARE NO IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE AND AS SUCH, ALL IMPLIED WARRANTIES ARE SPECIFICALLY DISCLAIMED.

## LIMITATION ON LIABILITY:

IN NO EVENT WILL BUCKINGHAM OR BUYER BE LIABLE TO THE OTHER FOR LOST REVENUES, LOST PROFITS OR ANY OTHER INDIRECT, CONSEQUENTIAL, SPECIAL OR PUNITIVE LOSSES OR DAMAGES, HOWEVER CAUSED, WHETHER IN ACTION FOR BREACH OF CONTRACT, STRICT LIABILITY, TORT, OR OTHERWISE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH LOSSES OR DAMAGES. IN NO EVENT WILL BUCKINGHAM'S LIABILITY EXCEED THE TOTAL AMOUNT PAID BY BUYER TO BUCKINGHAM FOR THE PRODUCT OR EQUIPMENT GIVING RISE TO SUCH CLAIM(S).

PLEASE SEE OTHER TERMS AND CONDITIONS RELATING TO THIS PRODUCT AT <https://buckinghammfg.com/terms-conditions/>

## REGISTRATION:

Before use of the product, ensure to register and confirm the product at [www.buckinghammfg.com/register](http://www.buckinghammfg.com/register).

**BUCKINGHAM MFG.**  
BINGHAMTON, NY  
1-800-937-2825  
[www.buckinghammfg.com](http://www.buckinghammfg.com)