

BUCKINGHAM MFG.

WOOD POLE FALL RESTRICTION DEVICE (WPFRD) THREADED CLEAT KIT - Installation Instructions

P/N 483S
BuckSqueeze

Warning: Do not use this product if you cannot understand and follow the instructions and warnings that come with it and complete all necessary functions.

Please consult with your physician prior to using this product. Do not use this product under the influence of drugs or alcohol.

Kit Includes:

- One *483S Threaded Cleat (PN 220214)
*cleats between WPFRD models are not interchangeable. Use only 483S cleat with the BuckSqueeze (483 series).
- One Single Use Tube 262 Red Loctite® (PN 130018)
- Installation Instructions



Fig. 1

P/N 483S Assembled in Channel Handle/ Cam Assembly

Tools Required:

- 3/8" box end wrench or similar (socket, adjustable wrench, etc.)

Threaded Cleat:

The Channel Handle / Cam Assembly (Fig.1) is equipped with a Threaded Cleat (Fig. 2). The Threaded Cleat, P/N 483S, is mounted into the frame of the 483D & 484T series BuckSqueeze Channel Handle/ Cam Assembly to provide enhanced gripping abilities. When installing, tighten snugly, do not over tighten.

Fig. 2
P/N 483S
Threaded Cleat



Assembly Instructions:

1. Apply 262 Red Loctite® on the threads of the Cleat.
2. Hold the BuckSqueeze bracket so that the flat edge is facing up (Fig. 3).
3. Insert the Threaded Cleat into the hole in the center of the flat edge and thread it into the hole in a clockwise direction.
4. Using a 3/8" wrench over the Cleat's hexagonal shoulder, tighten the Cleat until the bottom of the shoulder is in contact with the Channel Handle/ Cam Assembly frame (Fig. 4). Tighten snugly, do not over tighten.



Fig. 3

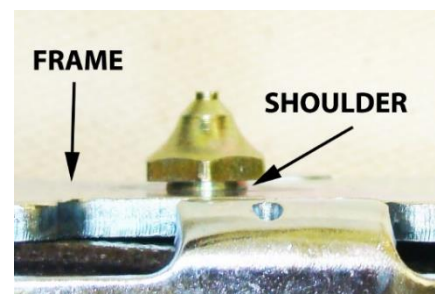


Fig. 4

P/N 488S SuperSqueeze

Kit Includes:

- One *488S Threaded Cleat {PN 220213} (Fig.1)
*cleats between WPFRD models are not interchangeable.
Use only 488S cleat with the SuperSqueeze (488 series).
- One Washer {PN 220224} (Fig.1)
- One Single Use Tube 262 Red Loctite® (PN 130018) (Fig.3)
- Installation Instructions

Tools Required:

- 3/8" box end wrench or similar
(socket, adjustable wrench, etc.)

Threaded Cleat:

The Outer Strap (Brown Neoprene Impregnated Nylon) is equipped with a Threaded Cleat. The Threaded Cleat, P/N 488S, is mounted into the Brown Outer Strap of the 488 series SuperSqueeze to provide enhanced gripping abilities. When installing, tighten snugly, do not over tighten.

Assembly Instructions:

1. Place the included washer onto the Cleat (Fig. 2).
2. Apply 262 Red Loctite® on the threads of the Cleat (Fig.3)
3. Insert the Cleat (with washer attached) into the threaded hole on the Brown Outer strap (Fig.4) and thread it into the hole in a clockwise direction.
4. Using a 3/8" wrench over the Cleat's hexagonal shoulder, tighten the Cleat until it is fully seated against the strap (Fig.5) Do not over tighten.

Note: Ensure the washer is seated on the shoulder of the Cleat (Fig. 5) and not caught under the shoulder. There should not be any space between the Cleat and the washer. (Fig.6).



P/N 488S
Fig. 1 Threaded Cleat



Fig. 2



Fig. 3



Fig. 4



Fig. 5



Fig. 6

STATEMENT of OBSOLESCENCE:

Precise “useful life expectancy” or “shelf life” for this product is not specified, as the degree of use, conditions of use, and the degree of care and storage determines useful life. All users maintain responsibility to select proper equipment for the job, be properly trained in its use, and ensure all personnel support equipment passes inspection before each use. Upon evidence of defects, damage or deterioration, all equipment shall be removed from service immediately and tagged or marked as unusable or destroyed. Additionally, all equipment shall be inspected on a regular basis not to exceed one year by a Competent Person, as defined by OSHA/ANSI, to verify that the equipment is safe for use. In the event of any question or concern regarding the condition of such equipment, users shall remove the equipment from service for further inspection. All users must comply with OSHA/ANSI/ASTM standards prior to and in using such equipment. For more information regarding safe and appropriate use of equipment, please contact Buckingham Manufacturing at 1-800-937-2825.

INTERNATIONAL USERS:

Notwithstanding the above, please know that certain international jurisdictions require manufacturers of equipment to provide customers with a maximum useful lifespan (sometimes referred to as a “Statement of Obsolescence”). To the extent required, Buckingham personal protective equipment manufactured from synthetic fiber materials including but not limited to items such as webbing and/or rope are subject to a maximum useful lifespan of ten (10) years from the date of manufacture. As stated above proper usage, storage, maintenance, and care impacts the useful lifespan of equipment. Extreme circumstances may require that product must be retired after only one use. This statement is made in conformance and compliance with BS EN 365:2004. International users must ensure that product inspections are completed by Competent Persons as defined by international standards including but not limited to British Standard (“BS”). If equipment fails any inspections, it must be immediately withdrawn from service and destroyed. For more information regarding safe and appropriate use of equipment, please contact Buckingham Manufacturing at 1-800-937-2825.

OUR GUARANTEE:

We guarantee the equipment we manufacture to be free from defects in material and workmanship. We will repair any equipment deemed to be defective which is returned to us by the original purchaser. However, this guarantee is void if any product is changed or altered in any way, or if the product is used in a manner other than for which it is intended. This express guarantee supersedes all other expressed or implied guarantees, obligations or liabilities. There are no implied warranties of merchantability or fitness for a particular purpose and as such, all implied warranties are specifically disclaimed.

LIMITATION ON LIABILITY:

In no event will Buckingham or buyer be liable to the other for lost revenues, lost profits or any other indirect, consequential, special or punitive losses or damages, however caused, whether in action for breach of contract, strict liability, tort, or otherwise, even if advised of the possibility of such losses or damages. In no event will Buckingham’s liability exceed the total amount paid by the buyer to Buckingham for the product or equipment giving rise to such claim(s).

Please see other terms and conditions relating to this product at <https://buckinghammfg.com/terms-conditions/>

REGISTRATION:

Before use of the product, ensure to register and confirm the product at www.buckinghammfg.com/register.

BUCKINGHAM MFG.
BINGHAMTON, NY
www.buckinghammfg.com
1-800-937-2825