



Buckingham Mfg. Co. Inc.

Inspection Check List for Shock Absorbing Lanyards and Harnesses


The following photos and descriptions outline conditions for which a Shock Absorbing Lanyard or Harness SHOULD BE LABELED UNSAFE AND BE TAKEN OUT OF SERVICE.

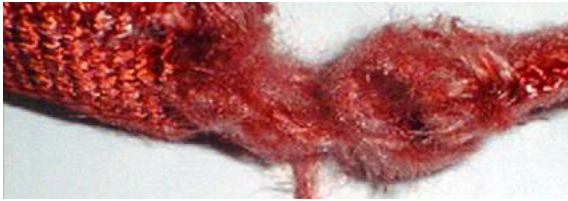


ABRADED WEBBING

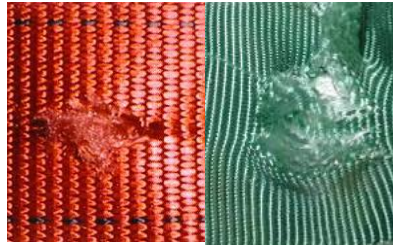

CUT IN WEBBING

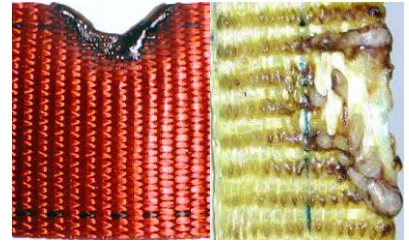

BURN IN WEBBING

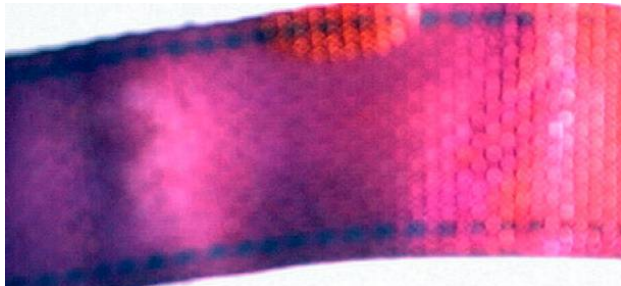


WEBBING EXPOSED TO
CHEMICAL AGENT



HOLES IN
WEBBING



LOOSE
STITCHING

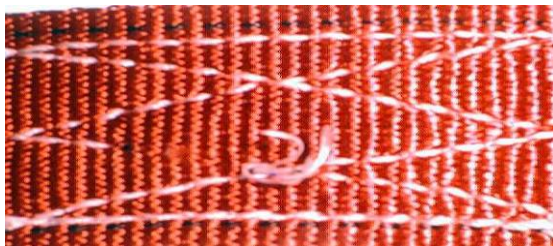

BROKEN STITCHING IN WEBBING



HEAVY FRAYING OF WEBBING



EXCESSIVE WEAR
EXPOSING RED WEAR MARKER
(1" YELLOW WEB)



DEPLOYED IMPACT
WARNING LABEL



DEPTH OF KEEPER IN BILL
3/16" Minimum



KEEPER TENSION: Less Than 2.5 lbs
*Note: Locking Mechanism must be depressed for
Keeper Tension check.



LOCKING MECH: Less Than 1.5 lbs



BENT OR DEFORMED
GROMMETS




EXCESSIVE WEAR OF HARDWARE OR CRACK (Cracks are indicated by fine black lines)



BROKEN



BENT

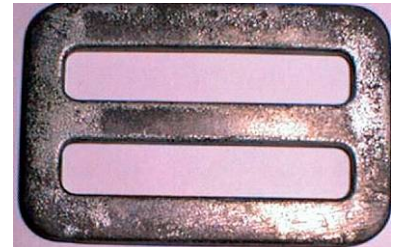

RUSTED HARDWARE



UNAUTHORIZED REPAIR / ALTERATION



HOOK AND LOOP DOES NOT ADHERE



WEBBING SUBJECT TO FALL
(IMPACT LOADING)

WARNING (IMPORTANT)

THE CONDITIONS OUTLINED IN THE ABOVE PHOTOS ARE NOT ALL INCLUSIVE TO ALL CONDITIONS THAT COULD RENDER A SHOCK ABSORBING LANYARD OR HARNESS UNSAFE. IT IS THE INDIVIDUALS RESPONSIBILITY TO INSPECT HIS/HER EQUIPMENT BEFORE EACH USE. IF THERE ARE ANY QUESTIONS AS TO THE SAFETY OF HIS/HER EQUIPMENT THEY SHOULD CONTACT THEIR SAFETY COORDINATOR OR CALL THE MANUFACTURER OF THE EQUIPMENT FOR GUIDENCE.

BUCKINGHAM MFG. COMPANY, INC
Binghamton, New York
(607)773-2400
www.buckinghammfg.com