

BUCKINGHAM MFG.

BuckAdjuster Adjustable Positioning Lanyard (APL) Instructions / Warnings PN 9- / 92C / 9A4 Series

Warning: Do not use this product if you cannot understand and follow the instructions and warnings that come with it and complete all necessary functions.

“BuckAdjuster” 1/2” 16 strand braided rope. Manufacturing matrix material option “8K” (see Fig.1)

Inspect Prior to each use: inspection should include but not be limited to the following:

Rope Inspection:

- Inspecting your rope should be a continuous process of observation before, during, and after each use.
- Inspect rope fibers for signs of excessive wear, burns, cuts, abrasions, kinks, knots, hocking, ice buildup, broken strands in any given area of the rope.
- If ice or snow build-up is noted, remove build-up prior to use by running the length adjusting device along the length of the rope. Ensure the length adjusting device is clean and free of packed snow or ice.
- Both outer and inner fibers contribute to the ropes strength. If either is worn, the rope will naturally be weakened. Open the rope strands and look for powdered fiber, which is one sign of internal rope wear.
- Inspect the rope for frayed strands and broken yarns. Check for pulled strands. A pulled strand should be re-threaded into the rope, if possible, otherwise it may snag on a foreign object during use.
- Inconsistent texture or stiff areas can indicate excessive dirt or grit embedded in the rope or shock load damage. Check that rope has not become hard or compacted. A hard or compacted rope indicates reduced strength.
- Inconsistent diameter (flat areas, bumps, or lumps). This condition indicates core or internal damage from overloading or shock loading.
- With use, all ropes become dirty. Inspect for areas of discoloration that could have been caused by chemical contamination and may result in the rope becoming brittle or stiff.
- Inspect the thread of the stitched eye for discoloration that could have been caused by chemical contamination and may result in the thread becoming brittle.
- Glossy or glazed areas that generally indicate signs of heat damage.
- Rope, rope stitching, splice and all whipped ends are free of defects (see Fig. 2 and 3). Stitched eyes have no loose, cut, or missing stitching and have a protective cover (shrink tube) over the stitching, and the cover must not be damaged, missing or torn. (see Fig. 3).
- For personal use only. NOT for towing or hoisting.
- If your Adjustable Positioning Lanyard is manufactured using Matrix Rope Option “8K” or “8R” do not use rope that has the red warning center / core exposed.

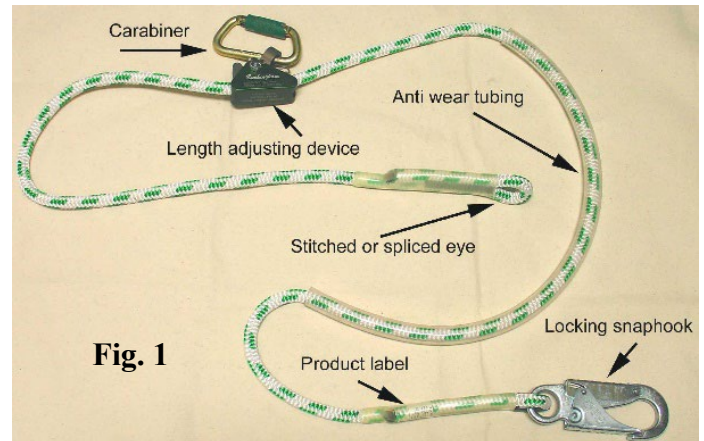


Fig. 1

MODEL 9-8 shown in Fig. 1.
Other models may have varying lengths, options & hardware from figures shown.


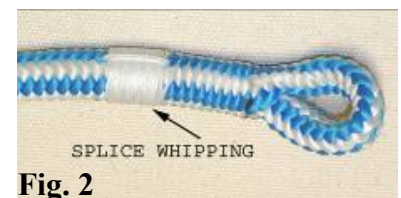


Fig. 2



Fig. 3

See photos below for examples of a variety of conditions indicated above:

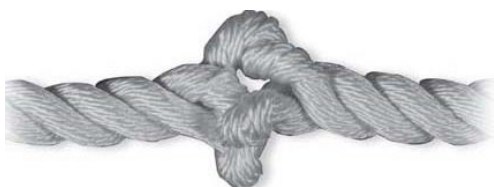

Hockled Rope



Rope with a Pulled Strand



Rope with Broken or Cut Strands



Melted / Glossy or Glazed Strands



Rope with Excessive Abrasion Wear

Snap Hook / Carabiner Inspection:

- Ensure locking device and keeper / gate operate freely and smoothly and that keeper / gate closes and remains closed and locked until intentionally opened.
- Inspect to ensure component is free of cracks, distortion, corrosion, or nicks.
- Ensure keeper / gate is not bent, is free of burrs, not packed with snow or ice, and that snap hooks / carabiners are clean and functioning properly.

Length Adjusting Device (LAD) Inspection:

- Unit is free of cracks – (usually depicted by fine jagged lines) and extensive wear or corrosion to cam lever, housing, or cam lever eye.
- The spring is assembled into the cam lever and body correctly.
- Ensure that the cam lever is installed in the proper orientation to the body (cam lever must be mounted in the same direction as shown in the sketch on the side of Length Adjusting Device (LAD)).
- Ensure that the centerlock nut is securely attached to the shoulder bolt. The bolt should be above or flush with the surface of the nut.
- Proper operation of mechanism by pivoting cam lever back and forth. Movement should be unrestricted with no binding. Binding could be caused by burrs, packed snow, or ice. A burr can be removed by disassembling the Length Adjusting Device (LAD) and lightly sanding the burr down with fine grit emery cloth.


NOTE: Also read and follow other instructions, warnings, and inspection guidelines enclosed with this product.

If any evidence of wear or deterioration as outlined above is observed, immediately cease use, destroy the product, and replace it with new equipment. Should any unusual conditions not outlined above be observed, or you have reasonable doubt about a particular condition, remove the equipment from service and notify your Supervisor, Safety Director, or contact Buckingham Mfg. Co. for clarification. Failure to carefully and completely inspect your equipment could result in serious injury or death.

Warnings:

- Know the job and the regulations governing performance requirements and select the proper equipment.
 - Read carefully, understand, and heed these and all other included instructions, warnings, and cautions before using this equipment. Failure to do so could result in your serious injury or death. Should questions arise concerning the proper use or condition of your equipment, contact Buckingham Manufacturing Co. at 1-800-937-2825.
 - All affixed labels should be left in place / unaltered, and all instructional material kept for future reference.
 - This equipment is intended for use by properly trained professionals only.
 - Please consult with your physician prior to using this product. Do not use this product under the influence of drugs or alcohol.
 - This product is designed to be used by a person with a maximum weight of 350 lbs. when fully equipped.
 - For personal use only. NOT for towing or hoisting.
 - Ensure that combinations of components or subsystems do not affect or interfere with the safe function of each other.
 - Fall protection equipment, (i.e. fall arrest, work positioning belts, climbers, retrieval, suspension etc.) should not be resold or provided to others for re-use after use by original user as assurance cannot be granted that a used product meets criteria of applicable standards and is safe for use to a subsequent user.
 - Be certain this equipment is suitable for the intended use and work environment. It should only be used as personal protection equipment (PPE). If suitability for intended use is in doubt, consult a safety engineer or contact Buckingham Mfg. before using.
 - Destroy any and all equipment subjected to impact loading.
 - Always attach each snap hook of the positioning strap to the proper circle D-ring of the body belt.
 - Do not attach work positioning snap hooks to accessory rings. Accessory rings are intended for attachment of a belt supporter only. Note: Belt supporters are intended to distribute belt weight of users who carry an unusually heavy load of tools. Belt supporters are not to support the weight of the user.
- As outlined by OSHA 1926.502 (e)(2) positioning devices shall be secured to an anchorage capable of supporting at least twice the potential impact load of an employee's fall or 3,000 lbf. (13.3 kN), whichever is greater. Additionally, reference ANSI Z359.2 anchorage requirements.

- Manufactured to the following standards / regulations as they are applicable ASTM F887 / ANSI Z359.3 / OSHA 1926.954/ CA. OSHA 2940.6 / CSA Z259.11.
- The Adjustable Positioning Lanyard is only one component / element of a positioning system outlined by ASTM F887 / ANSI Z359.3 / CSA Z259.11.
- Avoid contact of this equipment with sharp edged or pointed tools, high temperature surfaces, welding or other heat sources, electrical hazards or moving machinery. (Be aware of the lanyards position / placement on the pole or tree at all times in relation to the operations being performed. Use extreme caution when performing operations such as cutting, drilling, sawing, etc. Always perform this type of work well above the lanyard to avoid the potential of tool contact with the lanyard, causing damage which may result in a fall, serious injury or death).
- Avoid contact of this equipment with chemicals which may damage the material. If in doubt, contact supplier or Buckingham Mfg. Co.
- Guard against debris which could block the action of the cam (pebbles, twigs, ice, snow, etc.).
- If ice or snow buildup is noted, run the adjusting device along the length of the rope to remove the build-up and ensure the adjusting device is clean and free of packed snow or ice.
- Only Buckingham Mfg. Co., or those authorized in writing by Buckingham Mfg. Co., may make repairs / modifications to this equipment.
- Remove from service if subjected to impact loading. Even though no visible signs are present, internal damage may have occurred thus reducing its strength and margin of safety.
- This product is intended for work positioning only.
- The arrow on the housing should always point away from the user & towards the attached locking snaphook. **Note:** - Improper orientation of the LAD will result in the loss of locking action required to maintain adjustment of the rope when in use.
- The cam lever must be installed in the body in the same direction as shown in the sketch on the LAD body. **Note:** - Improper orientation of the cam lever will result in the loss of locking action required to maintain adjustment of the rope when in use.
- Center lock nut is not to be re-used after initial loosening or removal.
- LAD shall not be used on steel cable or wire rope.
- In the event of a cutout and if the cam lever of the LAD is held in the open position, rope will continue to feed through unit. Therefore, cam lever must be released for rope to stop feeding through LAD.
- Never use the Adjustable Positioning Lanyard where contact of the rope with sharp edges, corners or abrasive surfaces are likely. Sharp and abrasive surfaces may include but not be limited to (sheet metal, steel, concrete, block, stone, laminated materials etc.)
- Never wrap an Adjustable Positioning Lanyard around a sharp member as the material could be cut or damaged.
- Units manufactured with Anti Wear Tubing intended to minimize wear (i.e. abrasion, cuts, etc.) to the rope is intended for use on poles, trees, and other structures. When used for this function, ensure Anti Wear Tubing is adjusted properly to cover all contact points of pole, tree, or structure.
- With each use, visually check that the Adjustable Positioning Lanyard snap hook / carabiner freely engages the body belt circle D-ring and that the keeper / gate is completely closed and facing outward. Never rely solely on the feel or sound of a snap hook / carabiner engaging.
- Make sure each snap hook / carabiner is positioned so that its keeper / gate is never load bearing.
- When in the work position, ensure there is no pressure on the snap hook locking mechanism sufficient to depress it as this will, due to its length, render it incompatible with currently designed D-rings and make it very susceptible to rollout.
- Lubricate lock mechanism and keeper on both sides of snap hook at least weekly or as often as required to maintain smooth operation (no binding) with light weight lubricant such as WD-40®.
- Do not use lanyard for material handling purposes.
- Product covered under these instructions / warnings should not be resold / redistributed or re-used after use by original user.

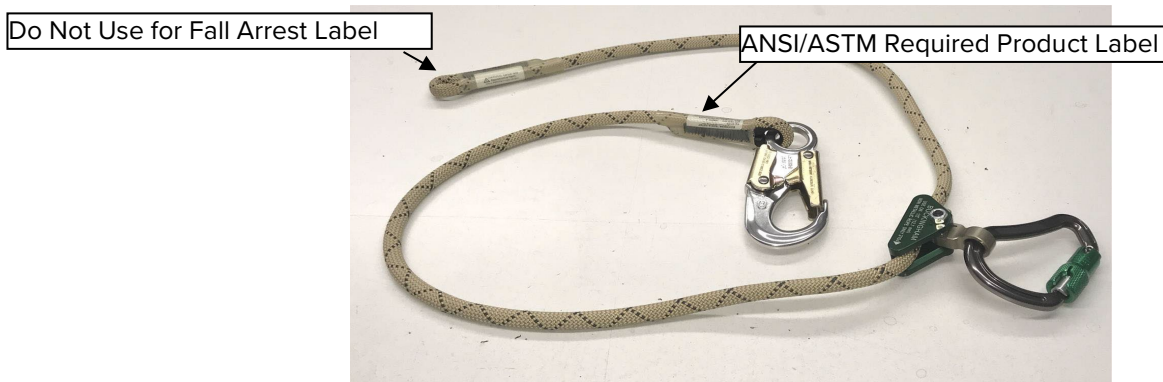

Hardware, lengths, and options may vary from that depicted in the illustration.

Disconnecting / Reconnecting Length Adjusting Device (LAD) onto Rope: This section applies only in the event the Adjustable Positioning Lanyard (rope line which includes locking snaphook and stitched or spliced eye) is replaced or LAD requires cleaning or the removal of a burr. Otherwise LAD is not to be disassembled. (See Fig. 4 for LAD part description). Notes: Only use LAD on compatible and proper diameter ropes which are stated on the side of LAD (see Fig.5). Buckingham LADs have been tested and approved for use as a Length Adjusting Devices used in conjunction with an Adjustable Positioning Lanyard on the following types of ropes: M4 LAD (Green) [PN 221027] is designed for 1/2" rope only and is compatible with the following ropes: 1/2" Blue Streak 16 strand rope, 1/2" XTC 16 strand rope, 1/2" Kernmantle rope and 1/2" High Vee rope.




Fig. 4



Fig. 5



Fig. 6



Fig. 7

To Disconnect / Disassemble:

1. Remove the centerlock nut from the shoulder bolt using a 3/16" Allen wrench and a 1/2" box end wrench (Fig. 6 & 7).
2. Discard the centerlock nut. Do not re-use.
3. Remove the shoulder bolt by pulling it out through the cam and the body of the LAD (Fig.8). Discard the bolt. Do not re-use.
4. Remove the cam lever from the body being cautious not to lose the return spring assembled into it. (Fig.9). Remove the rope from the LAD.




Fig. 8



Fig. 9



Fig. 10



Fig. 11

To Connect / Assemble:

Note- Reassembly requires the use of PN 5004BKIT (Nut & Bolt Kit).

1. Insert the rope into the groove of the LAD. The arrow shown on the device (Fig. 10) must point to the locking snap hook / carabiner end of the Adjustable Positioning Lanyard. If the Adjustable Positioning Lanyard is mounted on a pole, tree, or other structure, the arrow must point towards the same.
2. Place the spring into the cam spring slot. The bent tab portion of the spring must point outward, away from the cam (Fig.11).




Fig. 12



Fig. 13



Fig. 14




Fig. 15

3. Insert the cam lever and spring back into the body of the LAD (on top of the rope). The spring tab must be started into the small hole in the side of the LAD body first and then rotated inward (Fig.12).
4. Align the holes of the cam lever and the body of the LAD by pushing the cam lever in the directions shown (Fig.13 & 14). The cam lever must be mounted in the same direction as shown in the sketch on the side of the LAD.
5. From either side of the body, insert the new shoulder bolt from PN 5004BKIT completely through the body and the cam lever (Fig.15).
6. Thread the new centerlock nut from PN 5004BKIT onto the shoulder bolt and tighten until snug (75 in. lbs. max.) with a 3/16" Allen wrench and a 1/2" box end wrench. Do not over tighten the nut. The bolt should slightly protrude or be flush with the surface of the nut (Fig.16).
7. Check by pulling on the eye of the cam lever that the device grips the rope in the required direction.



Fig. 16

Be sure to perform a trial test while standing on the ground to ensure the LAD properly grips the rope / locks prior to climbing.

Adjustable Positioning Lanyard Attachment: (options & hardware may vary from product shown below)

Proper Attachment

Examples of Improper Attachment 



Fig.17



Fig.18a

Fig.18b



Fig.19



Proper Attachment: Carabiner and locking snaphook must be attached to work positioning D-rings as shown in Fig. 17. Gates of the carabiner and locking snaphook must be facing out.

Examples of Improper Attachment: Do not connect locking snaphook to anchor point other than work positioning D-rings. See Fig. 18a & 18b. Do not connect Adjustable Positioning Lanyard back onto itself and use as a cinch or choking device. See Fig.19.

To Operate:


1. Ensure Adjustable Positioning Lanyard is properly attached by leaning back slowly. Unit should support user.
2. To shorten the Adjustable Positioning Lanyard, lean slightly into the pole, tree, or other structure while pulling the free end of the rope through the cam lever and towards the same (Fig.20).
3. To lengthen the Adjustable Positioning Lanyard, slightly lean into the pole, tree, or other structure, to relax tension on the cam lever, slowly depress the cam lever towards the pole, tree, or other structure while leaning back slowly. (Fig.21).
4. While climbing above or below obstructions adjust Adjustable Positioning Lanyard to minimize fall distance to under two feet (2').



Cleaning / Storage Instructions:

A dirty product should be washed and rinsed in clean water, then dried. Do not store near solvents or corrosive chemicals or at extreme temperatures. Inspect your equipment carefully before use. This product should be stored in a clean and dry environment out of direct sunlight and away from extreme climate conditions. Ropes should be stored on racks or hooks to provide ventilation and should never be stored on concrete or dirt surfaces.

Warning / Product Identification Labels (Labels shown are Not to Scale. P/N, S/N, MFG. DATE and LENGTH will vary).

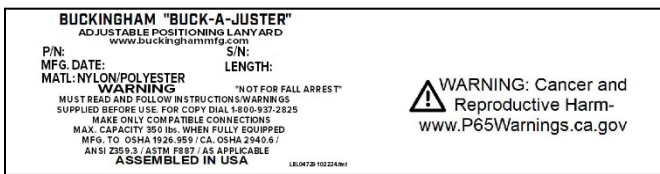

(Standard Product Label)

(Not for Fall Arrest Label)

Inspections:

Date of Purchase	Date of 1 st Use	User
Date Inspected		Condition

STATEMENT of OBSOLESCENCE:

Precise “useful life expectancy” or “shelf life” for this product is not specified, as the degree of use, conditions of use, and the degree of care and storage determines useful life. All users maintain responsibility to select proper equipment for the job, be properly trained in its use, and ensure all personnel support equipment passes inspection before each use. Upon evidence of defects, damage or deterioration, all equipment shall be removed from service immediately and tagged or marked as unusable or destroyed. Additionally, all equipment shall be inspected on a regular basis not to exceed one year by a Competent Person, as defined by OSHA/ANSI, to verify that the equipment is safe for use. In the event of any question or concern regarding the condition of such equipment, users shall remove the equipment from service for further inspection. All users must comply with OSHA/ANSI/ASTM standards prior to and in using such equipment. For more information regarding safe and appropriate use of equipment, please contact Buckingham Manufacturing at 1-800-937-2825.

INTERNATIONAL USERS:

Notwithstanding the above, please know that certain international jurisdictions require manufacturers of equipment to provide customers with a maximum useful lifespan (sometimes referred to as a “Statement of Obsolescence”). To the extent required, Buckingham personal protective equipment manufactured from synthetic fiber materials including but not limited to items such as webbing and/or rope are subject to a maximum useful lifespan of ten (10) years from the date of manufacture. As stated above proper usage, storage, maintenance, and care impacts the useful lifespan of equipment. Extreme circumstances may require that product must be retired after only one use. This statement is made in conformance and compliance with BS EN 365:2004. International users must ensure that product inspections are completed by Competent Persons as defined by international standards including but not limited to British Standard (“BS”). If equipment fails any inspections, it must be immediately withdrawn from service and destroyed. For more information regarding safe and appropriate use of equipment, please contact Buckingham Manufacturing at 1-800-937-2825.

OUR GUARANTEE:

We guarantee the equipment we manufacture to be free from defects in material and workmanship. We will repair any equipment deemed to be defective which is returned to us by the original purchaser. However, this guarantee is void if any product is changed or altered in any way, or if the product is used in a manner other than for which it is intended. This express guarantee supersedes all other expressed or implied guarantees, obligations or liabilities. There are no implied warranties of merchantability or fitness for a particular purpose and as such, all implied warranties are specifically disclaimed.

LIMITATION ON LIABILITY:

In no event will Buckingham or buyer be liable to the other for lost revenues, lost profits or any other indirect, consequential, special or punitive losses or damages, however caused, whether in action for breach of contract, strict liability, tort, or otherwise, even if advised of the possibility of such losses or damages. In no event will Buckingham’s liability exceed the total amount paid by the buyer to Buckingham for the product or equipment giving rise to such claim(s).

Please see other terms and conditions relating to this product at <https://buckinghammfg.com/terms-conditions/>

REGISTRATION:

Before use of the product, ensure to register and confirm the product at www.buckinghammfg.com/register.

BUCKINGHAM MFG.
Binghamton, NY
1-800-937-2825
www.buckinghammfg.com

Information contained in these written instructions supersedes all other information (written, audio, video etc.) produced by Buckingham Mfg. prior to the revision date of this document.